

ER-40W CHEMICAL ANCHOR




Workable Underwater


Epoxy Resin

Curing Time


°C	°C	10	20	30	40
°F	°F	50	68	86	104
gel	min.	60	15	7	4
cure	hr.	12	7	5	3




Drilling hole




Cleaning hole




Injecting Chemical



Insert stud or rebar




Full curing time ready to work




ER-40W with Rebar

Rebar No. (DAI)	Hole Diameter mm.	Hole Depth mm.	Max, Pull Out Loads kgf.
(D10)	13	100	3,233
(D13)	16	130	4,574
(D16)	20	160	9,767
(D19)	29	190	16,660
(D22)	28	220	22,867
(D25)	32	250	27,114
(D29)	35	290	35,966
(D32)	40	320	38,624
(D36)	45	360	44,906



ER-40W with Thread Rod

Thread Rod size mm.	Hole Diameter mm.	Hole Depth mm.	Max, Pull Out Loads kgf.
M8	10	80	3,600
M10	12	100	5,760
M12	14	120	7,200
M16	18	160	15,080
M20	22	200	22,920
M24	26	240	29,586
M30	32	300	34,431

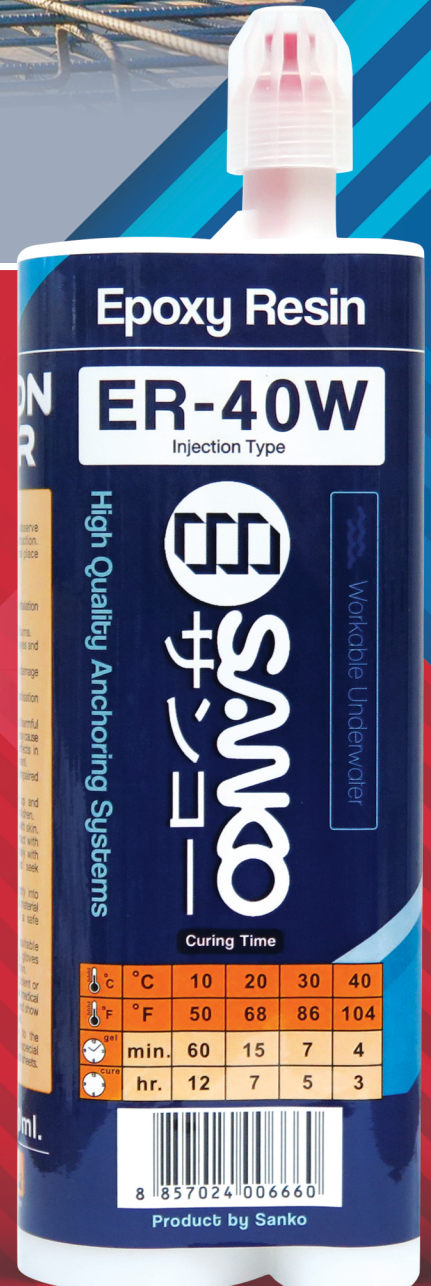

SANKO FASTEM (THAILAND) LTD.

บริษัท ซันโก ฟาสเทม (ไทยแลนด์) จำกัด
เลขที่ 2 ซอยพลโยธิน 96 ต.ประชาธิปัตย์ อ.ธัญบุรี จ.ปทุมธานี 12130
+66(0) 2516-9823-5 +66(0) 2516-9385, +66(0) 2516-9826
trading@sanko.co.th

8 857024 006660

Product by Sanko